SALVO SERIES









60% ENERGY SAVING APPLICABLE ON ECO-FRIENDLY SILENT INVERTER DC PUMP



EARTH WIRE INDICATOR



FLOW INDICATOR



RESIDUAL-CURRENT CIRCUIT BREAKER (RCCB) DEVICE



3-IN-1 DIVERTER



SPLASH PROOF CASE COVER WITH IEC INSULTED PROTECTION



BUILT-IN AUTO WATER FLOW SWITCH



EXTRA SAFETY DPDT PROTECTION SYSTEM



COMPACT WATER FILTER & STOP VALVE



UL-APPROVED HIGH QUALITY HEATING ELEMENT TECHNOLOGY FROM UK



SILENT INVERTER DC PUMP



Power Rating 4.25kW 240V 50Hz

 Min. Water Pressure
 0.2 Bar

 Min. Water Flow Rate
 1.68 / min

Noise Level <45db

Product Dimension (MDxH=m) 235x89x380

With Gold Rain Shower Set

RWH-S731D-GRUT

BELLE RWH-S731D-GRAB

SAND RWH-S731D-GRSS

RCP WM RM 947 | EM RM 997



With Black Accessories



RWH-S731D-BUT



RWH-S731D-BAB

RCP WM RM 662 | EM RM 697

SALVO SERIES



NON PUMP



Power Rating 4.25kW 240V 50Hz

Min. Water Pressure 0.2 Bar Min. Water Flow Rate 1.68 / min

Inlet/Outlet Water Connector ø15mm (1/2" BSP) Temperature Control Stepless Electronic 235x89x380 Product Dimension (MOXHMM)

With Black Accessories



RWH-S730N-BUT

RCP WM RM 433 | EM RM 456

🗯 LED ON

Ø LED OFF

FLOW LED INDICATOR

FLOW

Shower set installation & flow switch in order

1 Inlet & outlet installation in reverse or

(2) Flow switch (internal) malfunction

HEATER LED INDICATOR

HEATER

Temperature on


Temperature off

EARTH WIRE INDICATOR

EARTH POWER

Earth wire connected

A Earth wire disconnected (LED blinking)

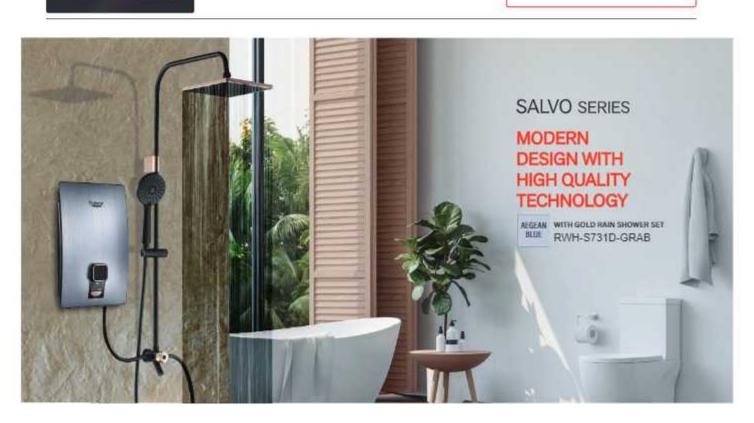

SALVO SERIES



FLOW LED INDICATOR

FLOW

HEATER LED INDICATOR

EARTH WIRE INDICATOR

EARTH COWER





SOPHISTICATED HAIRLINE FINISHING



ONE-PUSH PUMP CONTROL

PUMP

REVOLUTIONARY



WITH RAIN SHOWER SET RWH-S731D-GRUT



RESIDUAL-**CURRENT CIRCUIT** BREAKER (RCCB) DEVICE

Automatically measures and disconnects the circuit when residual current occurs or current exceeds rated sensitivity.



Rubine